


Buffer

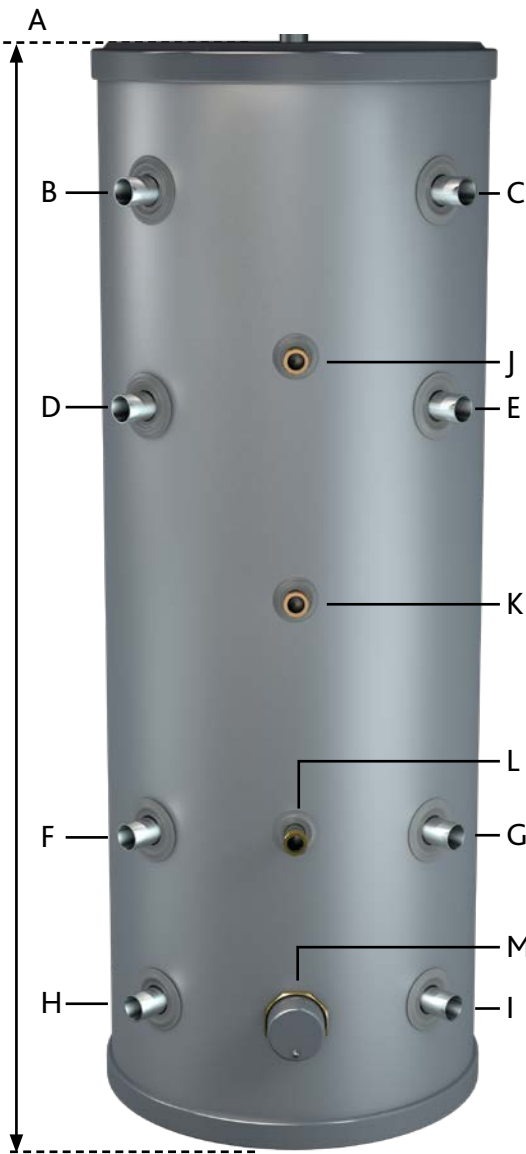

Body Material	1mm Duplex Stainless Steel
Operating Pressure	3 bar
Test Pressure	8 bar
Warranty	25 years
Casing	Aluzinc Grey
Kit Supplied	3kW immersion built in

Standard Diameter - 545mm							
Capacity (L)/ Buffer (L)		120	150	180	200	250	300
Height	A	945	1130	1314	1444	1752	1975
Tapp	B	659	846	1034	1142	1454	1677
Tapp	C	659	846	1034	1142	1454	1677
Tapp	D	513	596	724	910	1222	1445
Tapp	E	513	596	724	910	1222	1445
Tapp	F	325	380	380	380	380	380
Tapp	G	325	380	380	380	380	380
Tapp	H	190	190	210	210	210	210
Tapp	I	190	190	210	210	210	210
Stat 1	J	-	-	-	960	1272	1496
Stat 2	K	513	646	904	675	835	940
Stat 3	L	425	515	610	420	420	420
Immersion	M	210	210	210	210	210	210

Connection Sizes

9 x 1 1/2" female threaded connections as standard
(8 on the main body, plus 1 on the top)

Please note: These tapping heights are subject to change, and are to be used as a guideline only

Please note: This photo is illustrative of the range only, the cylinder shown may not be indicative of current product, and could be subject to change.

Description	Nominal Capacity (L)	Weight (KG)	Weight full (KG)	Height (mm)	Diameter (mm)	Standing Heat Loss		ERP BAND
						kWh/ 24h	WATTS	
120L	120	23	143	945	545	1.20	50	B
150L	150	27	177	1130	545	1.32	55	B
180L	180	31	201	1314	545	1.63	68	C
200L	200	35	235	1444	545	1.70	71	C
250L	250	40	290	1752	545	1.99	83	C
300L	300	45	335	1975	545	2.26	94	C
400L	400	51	431	1640	690	1.95	81	C
500L	500	54	529	1995	690	2.31	96	C
600L	600	63	633	2190	690	2.62	109	C



03330 329 650

www.ukcylinders.co.uk

UK CYLINDERS

YOUR HOT WATER SPECIALISTS

