




- Regulates the flow of fluid through the system
- Maximises heat collection in cylinders
- 28mm compression connections according to EN1254-2
- Clear window allows for easy adjustment of the flow rate
- Integral bi-directional ball valve stops water flow and allows access to fill and flush connections for servicing
- Suitable for use with water and up to 50% glycol solutions
- G3/4" Fill & Flush connections with retained sealing cover caps

Product Range

Code	Description
INFBV28	28mm Flow Balancing Valve 4 - 40 L/Min with G3/4" Fill & Flush
INFBV2850	28mm Flow Balancing Valve 10 - 50 L/Min with G3/4" Fill & Flush

Technical Features

Maximum Inlet Pressure:	10 Bar
Maximum Inlet Temperature:	110°C
Minimum Inlet Temperature:	-20°C
Medium:	Water + Glycol up to 50%

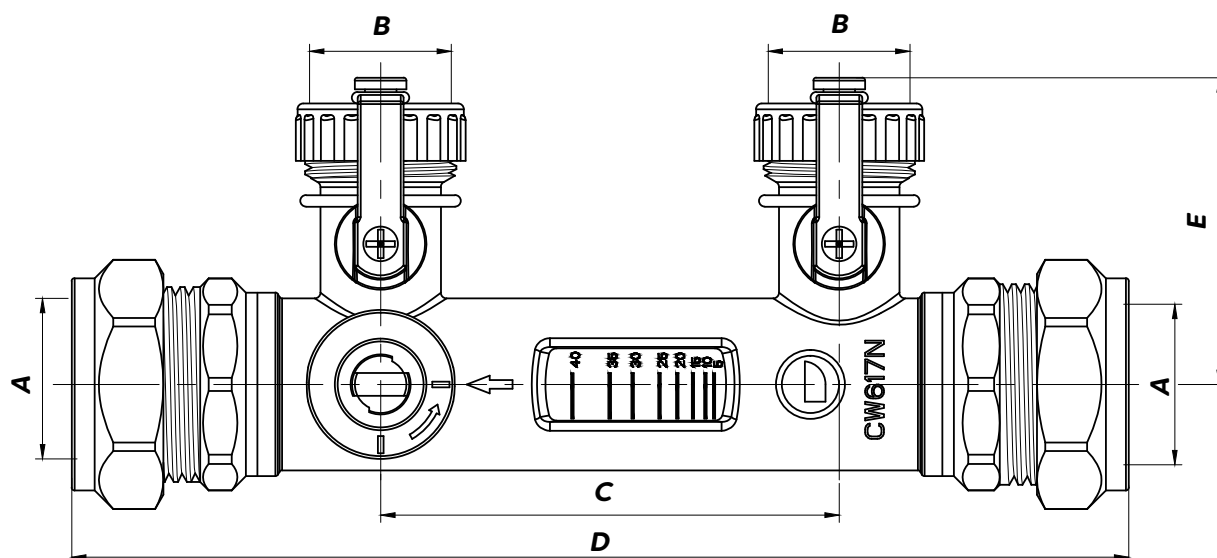

Code	A	B	C	D	E
INFBV28	Ø28	3/4"	80	184.5	53.5
INFBV2850	Ø28	3/4"	90	195	54.5

Diagrams

